


# NERLITE® DUNKELFELD-BELEUCHTUNG

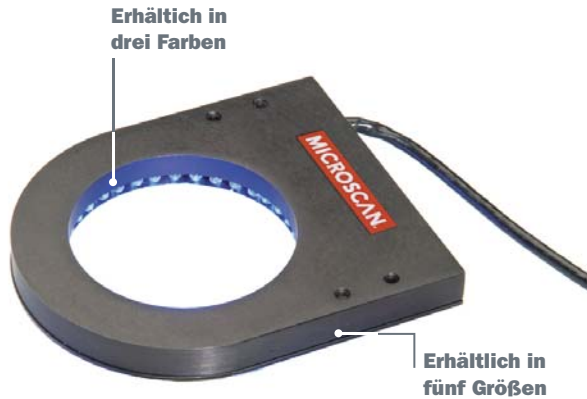


## Seitliche Beleuchtung im kleinen Winkel

Microscan's umfangreiche Serie von NERLITE Produkten beleuchten jedes Teil oder jede Markierung in erfolgreichen Machine Vision und Auto ID Applikationen.

Dunkelfeld-Beleuchtungen bieten eine effektive Ausleuchtung der Zielgebiete in einem kleinen Winkel, und erhöhen den Kontrast von Oberflächenstrukturen wie z. B. von Lasergravuren, Prägungen oder Oberflächenfehlern. Dunkelfeld-Beleuchtungen sind besonders gut geeignet für Applikationen wie das Lesen von lasergeätzten Symbolen und zu prüfenden Flächen mit geometrischen Konturen.

### Dunkelfeld-Beleuchtung: Im Überblick

- Liefert effektive Beleuchtung im kleinen Winkel
- Erhöht den Kontrast von Oberflächenstrukturen wie Lasergravuren oder Prägungen
- Modelle mit Blitzfähigkeit (Strobe) sind für Hochgeschwindigkeits-Applikationen erhältlich

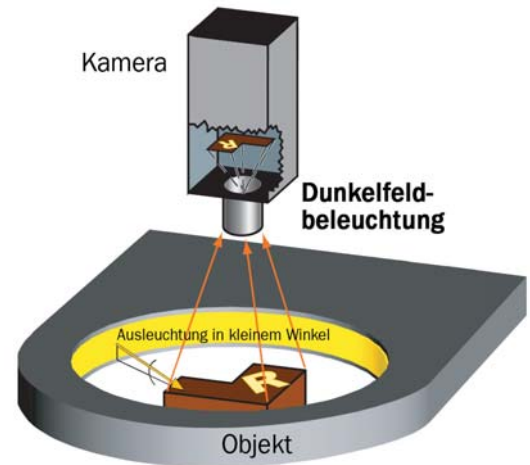

### Beleuchtungs-Beispiele:

Objekt



Ergebnisbild



**Gepprägtes Logo auf einer Metallfläche:** Beleuchtung im kleinen Winkel liefert ein hohes Kontrastbild

### Anwendungsbeispiele


- Helldarstellung strukturierter Oberflächen
- Hervorhebung von Höhenunterschieden
- Lesen von lasergravierten Symbolen
- Kontrolle von Flächen mit geometrischen Konturen
- Etikettenüberprüfung
- Platzierung der BGA-Lotperlen

# NERLITE® DARK FIELD SPECIFICATIONS AND OPTIONS

## DF 50

DESCRIPTION	TYPE	nm/K	CONT. CURRENT	STROBE CURRENT	mcd/cm <sup>2</sup>
DF-50, Red Continuous	NON-DIFFUSE	660 nm	69 mA		6250
DF-50, Red Strobe	NON-DIFFUSE	660 nm		1.2 A	54300
DF-50, White Continuous	NON-DIFFUSE	6500 K	120 mA		7000
DF-50, White Strobe	NON-DIFFUSE	6500 K		2.4 A	70000
DF-50, Blue Continuous	NON-DIFFUSE	470 nm	120 mA		5600
DF-50, Blue Strobe	NON-DIFFUSE	470 nm		2.4 A	56000


**Aperture Diameter:** 2" (51 mm) **Field of View:** 0.70" (18 mm)  
**Stand Off:** 0.30" (8 mm) **Weight:** 5 oz. (136 g)  
**Dimensions:** H 0.38" (9.5 mm) x W 3" (76.2 mm) x D 3.5" (88.9 mm)

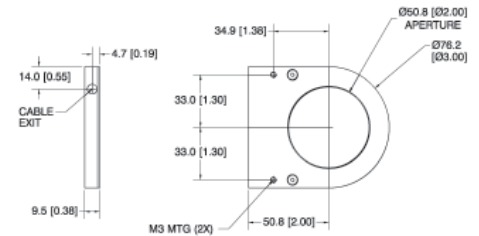

## DF 100

DESCRIPTION	TYPE	nm/K	CONT. CURRENT	STROBE CURRENT	mcd/cm <sup>2</sup>
DF-100, Red Continuous	NON-DIFFUSE	636 nm	100 mA		760
DF-100, Red Continuous	DIFFUSE	636 nm	100 mA		400
DF-100, Red Strobe	DIFFUSE	636 nm		2.0 A	4000

**Aperture Diameter:** 3.9" (100 mm) **Field of View:** 2" (51 mm)  
**Stand Off:** 0.50" (13 mm) **Weight:** 9 oz. (256 g)  
**Dimensions:** H 0.56" (14.2 mm) x W 5.5" (139.7 mm) x D 5.5" (139.7 mm)

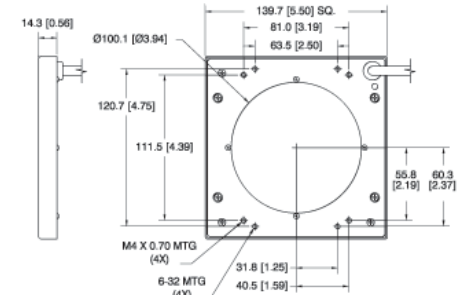


## DF 150

LEDs = 1 ROW

DESCRIPTION	TYPE	nm/K	CONT. CURRENT	STROBE CURRENT	mcd/cm <sup>2</sup>
DF-150-1, Red Continuous	NON-DIFFUSE	636 nm	100 mA		340
DF-150-1, Red Strobe	NON-DIFFUSE	636 nm		2.0 A	3400
DF-150-1, White Continuous	NON-DIFFUSE	6500 K	196 mA		700
DF-150-1, White Strobe	NON-DIFFUSE	6500 K		4.0 A	7000
DF-150-1, Blue Continuous	NON-DIFFUSE	470 nm	196 mA		600
DF-150-1, Blue Strobe	NON-DIFFUSE	470 nm		4.0 A	6000
DF-150-1, Red Continuous	DIFFUSE	636 nm	100 mA		410
DF-150-1, Red Strobe	DIFFUSE	636 nm		2.0 A	1800
DF-150-1, White Continuous	DIFFUSE	6500 K	196 mA		380
DF-150-1, White Strobe	DIFFUSE	6500 K		4.0 A	3800

**Aperture Diameter:** 4" (102 mm) **Field of View:** 3" (76 mm)  
**Stand Off:** 0.50" (13 mm) **Weight:** 18 oz. (504 g)  
**Dimensions:** H 0.56" (14.2 mm) x W 7.02" (178.4 mm) x D 7.02" (178.4 mm)

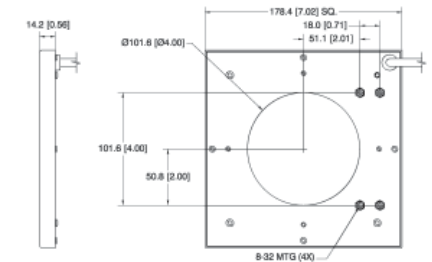


LEDs = 3 ROWS

DESCRIPTION	TYPE	nm/K	CONT. CURRENT	STROBE CURRENT	mcd/cm <sup>2</sup>
DF-150-3, Red Continuous	NON-DIFFUSE	636 nm	300 mA	ROW 1, 2	2290
DF-150-3, Red Strobe	NON-DIFFUSE	636 nm		7.14 A	22900
DF-150-3, White Continuous	NON-DIFFUSE	6500 K	450 mA		3540
DF-150-3, White Strobe*	NON-DIFFUSE	6500 K		8.0 A	47200

\* This product has two separate circuits.


**Aperture Diameter:** 2.9" (74 mm) **Field of View:** 1.5" (38 mm)  
**Stand Off:** 0.50" (13 mm) **Weight:** 7 oz. (193 g)  
**Dimensions:** H 1.02" (25.9 mm) x W 5.5" (139.7 mm) x D 6.37" (161.8 mm)

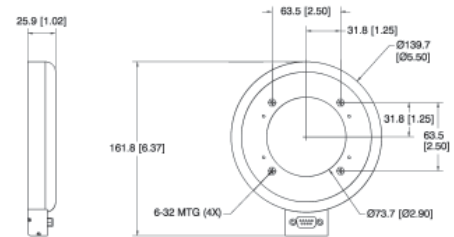

## DF 200

DESCRIPTION	TYPE	nm/K	CONT. CURRENT	STROBE CURRENT	mcd/cm <sup>2</sup>
DF-200, Red Continuous	DIFFUSE	636 nm	200 mA		170
DF-200, Red Strobe	DIFFUSE	636 nm		4.0 A	1700

**Aperture Diameter:** 8" (203 mm) **Field of View:** 3.9" (100 mm)  
**Stand Off:** 0.50" (13 mm) **Weight:** 20 oz. (567 g)  
**Dimensions:** H 0.56" (14.2 mm) x W 10" (254 mm) x D 10" (254 mm)

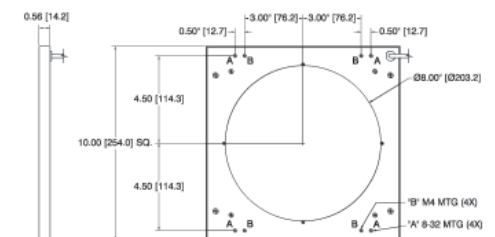

## ENVIRONMENTAL

**Operating Temperature:** 0° to 40° C (32° to 104° F)  
**Storage Temperature:** 0° to 50° C (32° to 122° F)  
**Humidity:** up to 95% (non-condensing)

## LIGHTING PARAMETERS

**Aperture Diameter Defined:** Diameter of opening through the illuminator.  
**Field of View Defined:** Largest recommended evenly illuminated area as seen from the camera (also known as Area of Interest [AOI]).  
**Stand Off Defined:** Recommended distance between the bottom of the light and the surface of the object being illuminated.

## LIGHT SOURCE

**Type:** High output LEDs  
**Light Output:** Millicandelas per square centimeter (mcd/cm<sup>2</sup>)  
**Expected Life:** 50,000 hours (Red LEDs)  
**Expected Life:** 10,000 hours (Blue, White LEDs)  
**Eye Safety:** EN 60825-1: Class 1 (Red, White LEDs); Class 2 (Blue LEDs)

## CONNECTOR

**Type:** 15 ft. (4.5 m) integrated cable with flying leads  
**Type (DF-150-3 Models Only):** DB9 male panel mount, 15 ft. (4.5 m) DB9 female to flying leads cable included

## ELECTRICAL

**Power (Continuous Models):** 24 VDC +/- 1%  
**Power (Strobe Models):** 1 ms max. pulse width, 6% max duty cycle, use of NERLITE NL-200 Series Lighting Controller is required.

## CE COMPLIANT

## ISO CERTIFICATION

Certified ISO 9001:2008 Quality Management System

©2010 Microscan Systems, Inc. SP050A-D 04/10

Microscan Applications Engineering is available to assist with evaluations. Results may vary depending on symbol quality. **Warranty**—One year limited warranty on parts and labor. Free extended three year warranty available with online product registration.

# MICROSCAN®

## Microscan Systems Inc.

Tel 425 226 5700 / 800 251 7711  
 Fax 425 226 8250

## Microscan Europe

Tel 31 172 423360 / Fax 31 172 423366

## Microscan Asia Pacific

Tel 65 6846 1214 / Fax 65 6846 4641

## www.microscan.com

Product Information: info@microscan.com  
 Auto ID Support: helpdesk@microscan.com  
 Vision Support: visionsupport@microscan.com  
 NERLITE Support: nerlitesupport@microscan.com